


MODEL CL15 - PARADIGM 2 X 40 LCD O.I.



- 2 LINE X 40 CHARACTER LIQUID CRYSTAL DISPLAY WITH LED BACKLIGHT
- 250 ALARM POINT LOGGER
- RECIPE HANDLING
- COMPREHENSIVE REPORT GENERATION
- UNLIMITED PASSWORD PROTECTION
- REAL TIME CLOCK, BATTERY BACKED
- EXPRESSION EVALUATION
- 32 BIT / FLOATING POINT MATH
- DIRECT, NETWORK (One family of PLCs) OR MODEM LINK TO PLC CONTROL SYSTEM

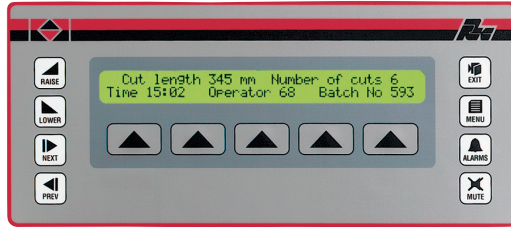

Click Icon For User Bulletin



FAX/WEB
DOC# 07005

Product Features

Model CL15 Operator Terminal combines unique capabilities normally expected only from high-end units, at a very affordable price. The CL15 is configured using the same powerful EDICT97 Software as all Red Lion Paradigm Operator Interfaces. The result is savings in time to get challenging applications up and running, and frequent savings in hardware costs due to replacing many functions usually performed in separate expensive devices.

POWERFUL DATA MANIPULATION

Model CL15 can perform 32-bit math functions. Values can be scaled, averaged, and signal linearization can be performed on inputs from non-linear sensors.

Math expression evaluation can be used in any context throughout the Panel Configuration software, and the Alarm Scanner can trigger outputs to display, or pass derived outputs back to external serial devices.

User Programs can be run utilizing 'C'-type language syntax for an infinite number of applications.

MEMORY

A large amount of data can be stored in memory. Event logs can maintain date and time-stamped records of plant activity, as well as complete alarm histories.

Large numbers of complex recipes can be stored in the panel much more economically than within a PLC.

COMMUNICATIONS

As well as a clear, easily read display, permanent records can be sent to an attached printer, using the full-page report generator facility on board.

Model CL15 can be connected to a wide variety of serial devices. It can communicate simultaneously with one or more PLC's on one port, and Red Lion intelligent devices on a second port. Paradigm database structure uses Named Data, rather than Tag Names to enable changes of connected PLC type without the common need, with competitor's products, to re-write the application.

Unlimited Password protection facilities allows user access to be precisely controlled.

Modem support enables systems to communicate with the world through the Operator Interface.


A unique database feature makes it simple to provide user-selectable language options for all display pages.

Interface Program downloads are fast. When developing applications, only changes are downloaded, saving valuable time.

CONSTRUCTION

CL15 is robustly constructed for an industrial environment. With a metal enclosure with a non-corroding NEMA 4/IP65 front panel.

DIMENSIONS "In inches (mm)"

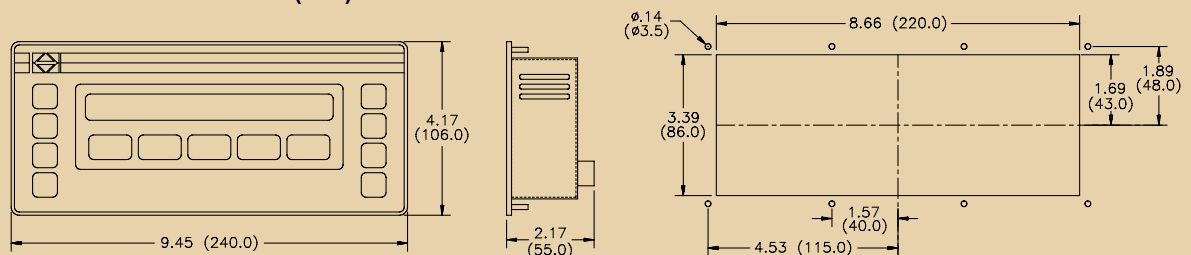

MODEL CL15 - PARADIGM 2 X 40 LCD O.I.

General Specifications

- POWER REQUIREMENTS:** 11 min. to 30 max. VDC @ 3.0 W
Power Up Current: 2.5 A for 1 msec. max.
Must use a Class 2 or SELV rated power supply.
- DISPLAY:** 2 lines of 40 characters, 0.197" (5 mm) high liquid crystal display with bright LED backlight (with on/off software control)
- KEYPAD:** 5 screen legendable soft keys, raise, lower, next, previous, exit, menu, alarms and mute keys, all with Tactile feedback.
- MEMORY:** 128 K (64 K user) battery backed RAM (Battery life expectancy 10 years). Optional factory fit expansion to 256 K (192 K user).
- PHYSICAL DIMENSIONS:** L = 9.45" (240 mm), H = 6.3" (160 mm), D = 2.17" (55 mm).
- CONSTRUCTION:** Metal enclosure with NEMA 4/IP65 front plate when correctly fitted with the gasket provided. This unit is rated for NEMA 4/IP65 indoor use. Installation Category I, Pollution Degree 2
- FIELD CONNECTIONS:** Removable screw terminal blocks.
- ENVIRONMENTAL CONDITIONS:**
Operating Temperature: 0 to 40°C
Storage Temperature: -20 to 80°C
Operating and Storage Humidity: 80% max. relative humidity (non-condensing) from 0°C to 40°C.
Altitude: Up to 2000 meters
- CERTIFICATIONS AND COMPLIANCES:**
SAFETY
EN 61010-1, IEC 1010-1
ELECTROMAGNETIC COMPATIBILITY
Immunity to EN 50082-2
Emissions to EN 50081-2
- WEIGHT:** 1.6 lbs. (0.72 Kg)

Input/Output Communications

- SERIAL PORTS:** Data Format and Baud Rates for each port is individually software programmable up to 19200 baud.
Port 1: Programming Port - RS-232 on an RJ-11 jack.
Port 2: RS-232 Port on a Plug-In Screw Terminal Block
Port 3: RS-485 Port on a Plug-In Screw Terminal Block
(Up to 20 units can be connected and individually addressed.)
- COMMUNICATION MODES:** Any of the three ports can be used to communicate with Serial Devices. The CL15 may utilize one device protocol to operate as either a Master or Slave, on one port. If required the CL15 may simultaneously communicate to Red Lion Serial devices, or a printer on a second port.

Note: LED Indicators show communications status on Ports 2 & 3

Ordering Information

MODEL NO.	DESCRIPTION	PART NUMBERS
CL15	LCD, 2 X 40, 5 Soft keys, 128 K memory	CL150000
	LCD, 2 X 40, 5 Soft keys, 256 K memory	CL150010