

MODEL IMR - INTELLIGENT RTD INPUT METER



- ACCEPTS STANDARD, 3-WIRE 100 W RTD SENSORS (ALPHA = 0.00385 or ALPHA = 0.00392) °F OR °C, 0.1 OR 1 DEGREE RESOLUTION
- FULL 6-DIGIT, HIGH VISIBILITY, 0.56" HIGH RED LED DISPLAY
- TIME - TEMPERATURE INTEGRATOR (Optional)
- PEAK/VALLEY MEMORY (Optional)



EMC COMPLIANT



NEMA 4 / IP65



PARAMETER LOCKOUT



FRONT PANEL PROGRAMMABLE



ALARMS



ANALOG OUTPUT



COMMUNICATIONS CAPABILITY

Click Icon For User Bulletin



FAX/WEB
DOC # 05005

Product Features

The Apollo Intelligent RTD Meter accepts standard RTD inputs and precisely linearizes them into temperature readings. A full 6-digit display accommodates a wide range of temperature inputs and holds large totalization values. Digital circuitry virtually eliminates errors due to drift.

The indicator features a readout choice of either Fahrenheit or Celsius with 0.1 or 1 degree of resolution. English Style display prompts and front panel buttons aid the operator through set-up and operation. A front panel lock-out menu protects set-up data and operation modes from unauthorized personnel. Programmable digital filtering enhances the stability of the reading and remote input "E1-CON" can be utilized to control a variety of totalizing, display hold, set point and peak/valley reading operations. All set-up data is stored in non-volatile E²PROM.

The indicator has several built-in diagnostic functions to alert operators of any malfunction. Extensive testing of noise interference mechanisms and full burn-in make the indicator extremely reliable in industrial environments. The die-cast front bezel meets NEMA 4/IP65 requirements for washdown applications. Plug-in style terminal blocks simplify installation wiring and change-outs.

OPTIONS


An optional integrator (totalizer) can be used to totalize or integrate temperatures up to a maximum display value of 999,999. It features independent scaling, decimal point, and a low temperature cut-out to suit a wide variety of temperature integration/totalization applications. Programmable remote input "E2-CON" pin is included with this option and can be utilized to control a variety of functions, such as integrating/totalizing, alarm control, peak/valley readings, display hold or temperature offset operations, simultaneously with "E1-CON" pin. Peak/valley (max/min) reading memory and programmable temperature offset functions are included with this option and they are easily recalled and controlled by either the front panel or a remote input. All readings are retained at power-down.

Optional dual relays with parallel solid state outputs are fully programmable to operate in a wide variety of modes to suit many control or alarm applications.

Optional 20 mA loop, bi-directional serial communications provides computer and printer interfacing to extend the capabilities of the indicator. More than one unit can be connected in the loop with other RLC products which have serial communications capabilities.

An optional 4 to 20 mA or 0 to 10 VDC re-transmitted analog output can be scaled by the user to interface with a host of recorders, indicators and controllers.

DIMENSIONS "In inches (mm)"

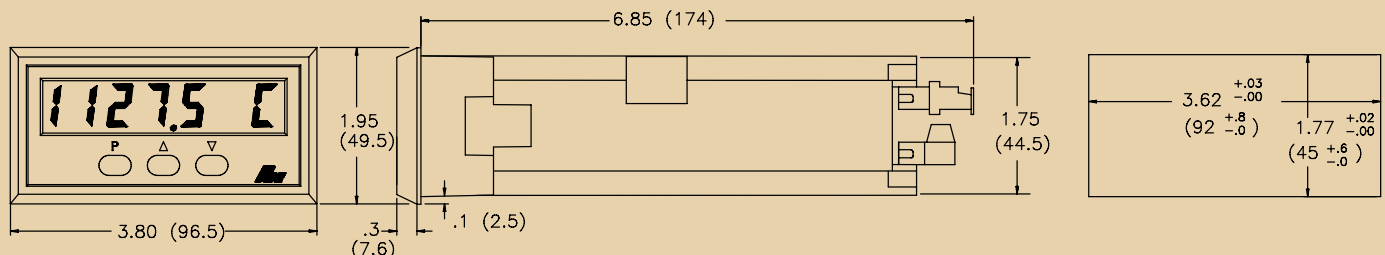

MODEL IMR - INTELLIGENT RTD INPUT METER

General Specifications

- DISPLAY:** 4-digit with F/C indication, 0.56" (14.2 mm) high LED, minus sign displayed for negative temperatures. 6-digits for integrator/totalizer, "Flashing" display during totalizer overflow. "LOL F" displayed during temperature display out of range (positive). "ULUL F" displayed during temperature display out of range (negative). "SHORT" displayed for shorted input and "OPEN" displayed for unconnected input.
- POWER REQUIREMENTS:**
 - A.C. Power:** Switch selectable 115/230 VAC, $\pm 10\%$, 50/60 Hz, 14 VA
- CONTROLS:** Three front panel push buttons for modifying alarm values and indicator set-up. Two external inputs for disabling the front panel and controlling programmable functions.
- INTEGRATOR/TOTALIZER:** Front panel button for input/total display select. External integrator/totalizer reset/enable. Programmable time-base, scale factor (0.001-100.000) and low-temp. cut-out. Response Time = 0.2 sec. max.
- ENVIRONMENTAL CONDITIONS:**
 - Operating Range:** 0 to 50 °C
 - Storage Range:** -40 to 80 °C
 - Span Drift:** 50 ppm/°C
- Zero Drift:** 0.001°C/°C
- Operating and Storage Humidity:** 85% max. (non-condensing) from 0 to 50°C.
- Altitude:** Up to 2000 meters
- PEAK/VALLEY (Optional):** Peak and Valley recording. Programmable temperature offset and slope.
- CERTIFICATIONS AND COMPLIANCES:**
 - SAFETY**
 - EN 61010-1, IEC 1010-1
 - ELECTROMAGNETIC COMPATIBILITY**
 - Immunity to EN 50082-2
 - Emissions to EN 50081-2
- CONSTRUCTION:** Die-cast metal front bezel that meets NEMA 4/IP65 requirements for indoor use when properly installed. Case body is black, high impact plastic (panel gasket and mounting clips included). Installation Category II, Pollution Degree 2.
- CONNECTION:** Removable terminal blocks
- WEIGHT:** 1.2 lbs (0.5 kg)

Input Specifications

- SIGNAL INPUT:** 3-Wire, 100 Ω platinum RTD, $\alpha = 0.00385$ (DIN 43760) or $\alpha = 0.00392$. 4-Wire sensors: Fourth wire unconnected.
 - Excitation:** 0.25 mA
 - Max. Input Signal Voltage:** ± 15 VDC.
- OPEN RTD DETECTION:**
 - Display:** "OPEN"
 - Setpoint Outputs:** Disabled (Deactivated)
 - Serial Outputs:** "OPEN" in data field
 - Integration/Totalization:** Disabled
 - Analog Output:** 20 mA or 10 VDC
- RANGE:**
 - 0.1° res:** -99.9° to 850.0°C (-99.9° to 999.9°F)
 - 1° res:** -200° to 850°C (-328° to 1562°F)Decimal Point Dependent.
- RESOLUTION:** 0.1 or 1 degree.
- LEAD RESISTANCE EFFECT:** 20 Ω max., 2.5°C/ Ω error for V exc. and common lead unbalance.
- ACCURACY:** 0.3°C, @ 23°C and 20 min. warm-up.
- READING RATE:** 1.25 readings/second
- RESPONSE TIME:** 2 seconds to settle for step input (increases with programmable digital filtering)
- E1-CON & E2-CON:** External remote inputs that allow activation of various functions. (Reset total, peak indicator mode, trigger mode, etc.) $V_{IL} = 0.8 V_{MAX}$; $V_{IH} = 2.0 V_{MIN}$; Response Time = 0.2 sec. max.
- NORMAL MODE REJECTION:** 40 dB at 50/60 Hz (may be improved by programmable digital filtering)
- COMMON MODE REJECTION:** 120 dB, DC to 50/60 Hz

Output Specifications

- SERIAL COMMUNICATIONS (Optional):**
 - Type:** Bi-directional 20 mA current loop, 20 mA source provided on transmit loop. (Powers up to 7 units in a loop with internal current source).
 - Baud Rate:** programmable 300 to 2400
 - Maximum Address:** 99 (Actual number in a single loop is limited by serial hardware specifications.)
 - Data Format:** 10 bit frame, Odd parity (one start bit, 7 data bits, one odd parity bit, and one stop bit.)
 - Serial Hardware Specifications:**
 - SO - Output Transistor Rating:** $V_{MAX} = 30$ VDC, $V_{SAT} = 1 V_{MAX}$ at 20 mA.
Note: This will allow up to 28 units max. in each loop.
 - SI - Input Diode Rating:** $V_F = 1.25V_{TYP}$; $1.5V_{MAX}$
Note: The compliance voltage rating of the source must be greater than the sum of the voltage drops around the loop. (Typically a 30 VDC powered source would be capable of operating between 18 and 22 units in a loop.)
- ALARMS (Optional):**
 - Solid State:** Two, isolated, sinking open collector NPN transistors acting in parallel with relays. $V_{SAT} = 1V @ 100$ mA max., $V_{max} = 30$ VDC.
 - Relays:**
 - Type:** Form C (2)
 - Max. Rating:** 5 Amps @ 120/240 VAC or 28 VDC (resistive load), 1/8 hp @ 120 VAC (inductive load).
 - Relay Life Expectancy:** 100,000 cycles at max. rating. (As load level decreases, life expectancy increases.)
- ANALOG OUTPUT (Optional):**
 - 4 to 20 mA:** Digital scaling and offsetting within 4 to 20 mA range
 - Accuracy:** 0.1% of full scale
 - Resolution:** 12 bits
 - Compliance Voltage:** 10 VDC (500 Ω max. loop resistance)
 - 0 to 10 VDC:** Digital scaling and offsetting within 0 to 10 VDC range
 - Accuracy:** $\pm(0.1\%$ of reading +35 mV)
 - Resolution:** 12 bits
 - Min. Load Resistance:** 10 K Ω (1 mA max.)

MODEL IMR - INTELLIGENT RTD INPUT METER

Ordering Information

MODEL NO.	DESCRIPTION	TOTALIZER/ PEAK/VALLEY/ SLOPE/OFFSET/ E2-CON	DUAL ALARMS	SERIAL OUTPUT	ANALOG OUTPUT	PART NUMBERS FOR AVAILABLE SUPPLY VOLTAGES
						115/230 VAC
IMR	Intelligent Process Meter for RTD	NO	NO	NO	NO	IMR00160
		NO	YES	NO	NO	IMR00162
		YES	NO	NO	NO	IMR02160
		YES	NO	YES	NO	IMR02161
		YES	YES	NO	NO	IMR02162
		YES	NO	NO	4 to 20 mA	IMR02163
		YES	YES	YES	4 to 20 mA	IMR02167
		YES	YES	YES	0 to 10 VDC	IMR02169