




Switch Disconnectors

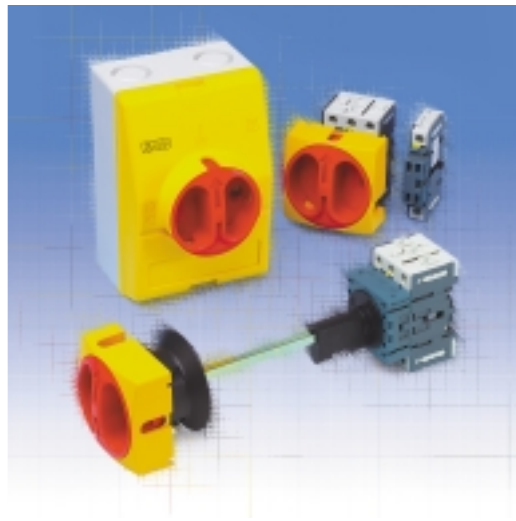

- Reversible terminals allow the same switch body to be used in both front & rear mount applications
- 25A - 32A - 50A - 63A - 80A - 100A versions available
- Neutral pole, additional poles & auxiliary contacts are simply snapped in to place
- Clutch drive with metal cuttable shafts and door interlock for rear mounting
- Enclosure versions
- UL approved


CONTENTS

Switch Disconnectors

Technical Specification	30
Standard Versions	31
Component Parts	32
Component Parts	33



PANORAMIC VIEW OF THE REVERSO RANGE

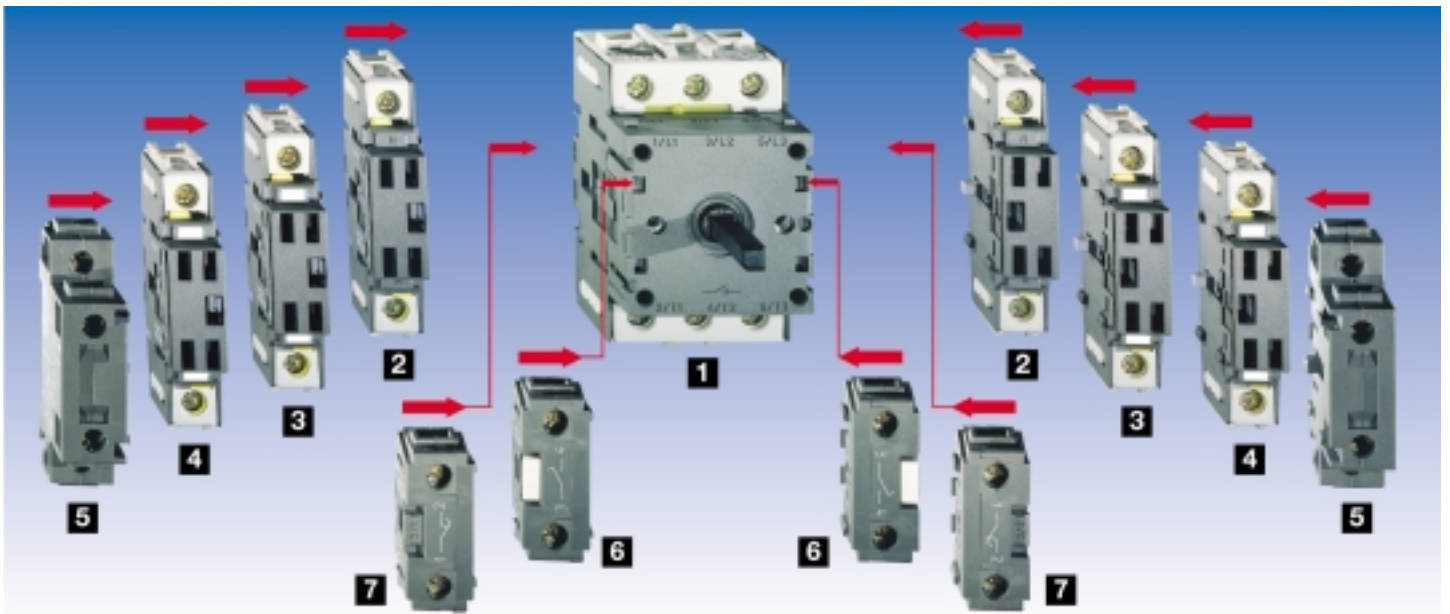

1 Basic 3 pole switch body
2 Neutral pole

3 Additional pole
4 Junction block

5 Auxiliary NC/NO contact
6 Late make/early break auxiliary contact

7 Early make/late break auxiliary contact

Possible Combinations

- Up to 2 additional poles/ neutral poles/ junction blocks can be added to each side of the switch body
- Up to 1 additional pole/ neutral pole/ junction block and the auxiliary NC/NO contact can be added to each side of the switch body but the auxiliary NC/NO contact must be on the outside
- Up to 1 late make or early make auxiliary contact can be added to each side of the switch body using the standard component parts
- Up to 2 late make or early make auxiliary contacts can be added to each side of the switch body but must be specially ordered

TECHNICAL SPECIFICATION


Switch Bodys & Auxiliary Controls		25 A	32 A	50 A	63 A	80 A	100 A
Rated operating voltage U_i	V	690	690	690	690	690	690
Rated thermal current - open - $I_{u/lth}$	A	25	32	50	63	80	100
Rated thermal current - enclosed - I_{th}	A	20	25	40	50	63	80
Rated impulse withstand voltage U_{imp} kV		6	6	6	6	6	6
Rated operating current I_e le AC - 21A/22A 230 to 690 V	A	25	32	50	63	80	100
Rated operating power							
AC - 23A							
3 x 230 V	kW	5,5	5,5	15	15	18,5	22
3 x 400 V		7,5	11	18,5	22	30	37
3 x 500 V		7,5	11	22	30	37	45
3 x 690 V		7,5	11	18,5	22	22	30
AC - 3							
3 x 230 V	kW	4	4	7,5	11	15	18,5
3 x 400 V		5,5	7,5	15	18,5	22	30
3 x 500 V		5,5	7,5	15	22	30	37
3 x 690 V		5,5	7,5	15	18,5	18,5	22
Make - break characteristics							
Rated make capacity	Aeff/400 V	710	710	1270	1270	1970	1970
Rated break capacity	Aeff/400 V	330	330	800	800	800	800
Short circuit characteristics							
Rated short time withstand current - I_{cw}	Aeff/400 V/1s	350	430	500	760	1100	1500
Rated short circuit make capacity - I_{cm}	kA peak/400 V	1	1	1,8	1,8	2,8	2,8
Short circuit current	kA eff/400 V	10	10	10	10	10	10
with fuse gI/gG	A	25	32	50	63	80	100
Mechanical life AC - 20	million	0,1	0,1	0,04	0,04	0,04	0,04
Connections							
Stranded wire plus connector (max/min)	mm ²	6/0,75	6/0,75	16/1,5	16/1,5	35/2,5	35/2,5
Solid wire	mm ²	10	10	25	25	50	50
Storage temperature	Deg C	- 30 to + 70 - 30 to + 70 - 30 to + 70 - 30 to + 70 - 30 to + 70 - 30 to + 70 - 30 to + 70					
Operating temperature	Deg C	- 30 to + 70 - 30 to + 70 - 30 to + 70 - 30 to + 70 - 30 to + 70 - 30 to + 70 - 30 to + 70					
Protection rating		inside panel : IP xx B outside panel : IP 40 IP 65 upon request					
Conformity to standards		IEC 947-3 - EN 60 947-3					
Approvals		UL - cUL (USA - Canada)					
Climatic resistance		Tropical atmosphere according to : IEC 68/2.3 constant humid heat IEC 68/2.30 cyclical humid heat					
Auxiliary contact electrical characteristics							
Rated operating voltage - U_i	V	400	400	400	400	400	400
Rated thermal current - open - $I_{u/lth}$	A	10	10	10	10	10	10
Rated operating current - I_e	AC - 15 230 V A	6	6	6	6	6	6
	400 V A	4	4	4	4	4	4
Protection against short circuit by fuse gG	A	10	10	10	10	10	10
Connection	Stranded wire mm ² max.	2 x 2,5	2 x 2,5	2 x 2,5	2 x 2,5	2 x 2,5	2 x 2,5

ENCLOSURES

Dimensions (mm)	150 x 100 x 96	220 x 150 x 100	220 x 150 x 100	220 x 150 x 100	220 x 150 x 100	300 x 220 x 100
REVERSO rating	25 and 32 A	25 and 32 A	50 and 63 A	50 and 63 A	80 and 100 A	80 and 100 A
	3 poles to	6 poles and	3 poles to	6 poles and	3 poles and	4 poles to
	4 poles + NC/NO	6 poles + NC/NO	4 poles + NC/NO	6 poles + NC/NO	3 poles + NC/NO	6 poles + NC/NO
Cable entries	2 x 2 Pg 16 or M25 2 x Ø23 on rear	2 x 2 Pg 21	2 x 2 Pg 21	2 x 2 Pg 29	2 x 2 Pg 29	2 x 2 Pg 21 and 2 x 2 Pg 29
Ø push-through openings (mm)	22,5 or 25	28,5	28,5	37,5	37,5	37,5/28,5
Number/face (top and bottom)	2	2	2	2	2	4
Panel mounting	by 4 screws (see dimensional drawing on page 33)					
Lid/base assembly	by 1 self-tapping screw	by 4 self-tapping screws	by 4 self-tapping screws	by 4 self-tapping screws	by 4 self-tapping screws	by 6 self-tapping screws
Switch/base assembly	on 35 mm DIN rail (this rail is suitably notched to ensure the positioning of the switch)					
Presentation mounting	Handle moulded in lid	pre-pierced lid				
Insulation	classe II installed (provided correct usage of the insulation plugs which must be pushed down over the base-to-panel mounting screws, supplied with each enclosure)					
Impact resistance	IK 07					
Fire resistance	960 °C by incandescent wire (IEC 925-2-1)					
Protection rating	IP66	IP 40 in standard version (IP 65 on request)				

STANDARD VERSIONS

yellow/red presentation



Front mount with padlockable handle



Rear mount with clutch drive, door interlock & padlockable handle



Enclosure with integral padlockable handle IP66



Enclosure & padlockable handle

25A				
3 Pole	0172001	0165009	0172061	—
3 Pole + NC/NO	0172011	0165019	0172071	—
4 Pole neutral L	0172021	0165029	0172081	—
4 Pole neutral L + NC/NO	0172031	0165039	0172091	—
4 Pole neutral R	0172041	0165049	—	—
4 Pole neutral R + NC/NO	0172051	0165059	—	—
6 Pole	—	—	—	0172009
6 Pole + NC/NO	—	—	—	0172029
32A				
3 Pole	0172101	0165109	0172161	—
3 Pole + NC/NO	0172111	0165119	0172171	—
4 Pole neutral L	0172121	0165129	0172181	—
4 Pole neutral L + NC/NO	0172131	0165139	0172191	—
4 Pole neutral R	0172141	0165149	—	—
4 Pole neutral R + NC/NO	0172151	0165159	—	—
6 Pole	—	—	—	0172109
6 Pole + NC/NO	—	—	—	0172129
50A				
3 Pole	0172201	0165209	—	0172261
3 Pole + NC/NO	0172211	0165219	—	0172271
4 Pole neutral L	0172221	0165229	—	0172281
4 Pole neutral L + NC/NO	0172231	0165239	—	0172291
4 Pole neutral R	0172241	0165249	—	—
4 Pole neutral R + NC/NO	0172251	0165259	—	—
6 Pole	—	—	—	0172209
6 Pole + NC/NO	—	—	—	0172229
63A				
3 Pole	0172301	0165309	—	0172361
3 Pole + NC/NO	0172311	0165319	—	0172371
4 Pole neutral L	0172321	0165329	—	0172381
4 Pole neutral L + NC/NO	0172331	0165339	—	0172391
4 Pole neutral R	0172341	0165349	—	—
4 Pole neutral R + NC/NO	0172351	0165359	—	—
6 Pole	—	—	—	0172309
6 Pole + NC/NO	—	—	—	0172329
80A				
3 Pole	0172401	0165409	—	0172461
3 Pole + NC/NO	0172411	0165419	—	0172471
4 Pole neutral L	0172421	0165429	—	0172481
4 Pole neutral L + NC/NO	0172431	0165439	—	0172491
4 Pole neutral R	0172441	0165449	—	—
4 Pole neutral R + NC/NO	0172451	0165459	—	—
6 Pole	—	—	—	0172409
6 Pole + NC/NO	—	—	—	0172429
100A				
3 Pole	0172501	0165509	—	0172561
3 Pole + NC/NO	0172511	0165519	—	0172571
4 Pole neutral L	0172521	0165529	—	0172581
4 Pole neutral L + NC/NO	0172531	0165539	—	0172591
4 Pole neutral R	0172541	0165549	—	—
4 Pole neutral R + NC/NO	0172551	0165559	—	—
6 Pole	—	—	—	0172509
6 Pole + NC/NO	—	—	—	0172529

Notes: (1) Neutral on the left or the right is as seen from the operators view

(2) Rear mount with clutch drive and door interlock:


- 25A & 32A metal shaft length suitable for panel depth 125mm to 250mm
- 50A & 63A metal shaft length suitable for panel depth 135mm to 260mm
- 80A & 100A metal shaft length suitable for panel depth 145mm to 420mm

(3) Protection rating is IP40 as standard, IP65 on request and IP66 as standard on enclosure version with integral handle

(4) Enclosure mounted versions have non reversible terminals

(5) Grey padlockable handle is available as an alternative to red/yellow, please enquire for details

3 POLE SWITCH BODY

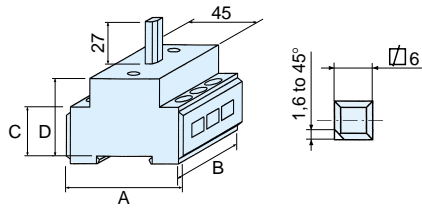


Size	A	B	C	D
1	75.4	44.0	31.5	50.0
2	85.0	53.6	42.2	60.0
3	93.0	71.8	52.6	70.0


Switch Body 3 Pole 25A (AC21) *Size1	0172000
Switch Body 3 Pole 32A (AC21) *Size1	0172100
Switch Body 3 Pole 50A (AC21) *Size2	0172200
Switch Body 3 Pole 63A (AC21) *Size2	0172300
Switch Body 3 Pole 80A (AC21) *Size3	0172400
Switch Body 3 Pole 100A (AC21) *Size3	0172500

DRILL PLAN


Padlockable Presentation





25/32A	66 x 66
50/63A	66 x 66
80/100A	86 x 86



Rear Mount



RED/YELLOW PADLOCKABLE HANDLE




Size	A	B	C
1 - 2	66	66	86
3	86	86	106

Padlockable, Screw Mount, *Size1 & *Size2	0172601
Padlockable, Screw Mount, *Size3	0172621
Padlockable, Dia 22mm Hole Mount, *Size1	0172603


To order any of the above padlockable handles in Grey / Black instead of Red / Yellow change the start of the part number from 0172 to 0174.
Example:- Padlockable in Grey for 25A (*Size1) Switch Body = 0174601

ADDITIONAL CONTACTS




Size	A	B	C
1	75.4	14.5	43.5
2	85	17.9	60
3	93	26.8	70

Neutral Pole 25A	0172065
Neutral Pole 32A	0172165
Neutral Pole 50A	0172265
Neutral Pole 63A	0172365
Neutral Pole 80A	0172465
Neutral Pole 100A	0172565
Additional pole 25A	0172075
Additional pole 32A	0172175
Additional pole 50A	0172275
Additional pole 63A	0172375
Additional pole 80A	0172475
Additional pole 100A	0172575



Junction Block Dims are the same as the Neutral / Additional Poles


Auxiliary NO + NC Contact * All Sizes (Ui=400V Ie AC15 230V 6A - 400V 4A)	0172179
Junction Block *Size1	0172185
Junction Block *Size2	0172385
Junction Block *Size3	0172585



Late Make/Early Break Auxiliary Contact *Size1	0172195
Late Make/Early Break Auxiliary Contact *Size2	0172395
Late Make/Early Break Auxiliary Contact *Size3	0172595
Early Make/Late Break Auxiliary Contact *Size1	0172197
Early Make/Late Break Auxiliary Contact *Size2	0172397
Early Make/Late Break Auxiliary Contact *Size3	0172597
(Ui = 400V Ie AC15 230V 6A - 400V 4A)	

CLUTCH DRIVE KITS

Each kit contains all of the parts required to convert a standard switch body and padlockable handle for rear mount with clutch drive. Consult the table for each kits panel depth dimensions. The door interlock shroud is available separately




Clutch drive presentation from 25A to 100A

x (mm)	No shaft	Short shaft	Long Shaft
25 - 32A	86 to 100	125 to 250	250 to 400
50 - 63A	96 to 110	135 to 260	260 to 410
80 - 100A	106 to 120	145 to 270	270 to 420

Clutch Drive Kit (No shaft)	0174179
Clutch Drive Kit (Short shaft)	0174189
Clutch Drive Kit (Long shaft)	0174199
Door interlock shroud	0174249

ACCESSORIES



Size	A	B
1	25	85
2	35	90
3	50	100

Dims for Rear Mount Plate

Rear Mounting Plate *Size1	0172187
Rear Mounting Plate *Size2	0172387
Rear Mounting Plate *Size3	0172587
IP65 Kit *Size1 & *Size2 for front mount	0172267
IP65 Kit *Size3 for front mount	0172277
IP65 Kit *Size1 and Size2 for rear mount with clutch drive	0174259
IP65 Kit *Size3 for rear mount with clutch drive	0174269
Duty Label "Mainswitch"	0172649




Terminal Cover For 3 Pole Switch Body *Size1	0172167
Terminal Cover For 3 Pole Switch Body *Size2	0172367
Terminal Cover For 3 Pole Switch Body *Size3	0172567
Terminal Cover For Neutral or Junction Block *Size1	0172177
Terminal Cover For Neutral or Junction Block *Size2	0172377
Terminal Cover For Neutral or Junction Block *Size3	0172577
Terminal Cover (Pair) For Auxiliary NO + NC Contact	0172189
Terminal Cover For Early Make / Early Break Contact	0172199

ENCLOSURES



Empty Enclosure dimensions 220 x 150 x 100 for 25 & 32A up to 6 poles + auxiliary	0172559
Empty Enclosure dimensions 220 x 150 x 100 for 50 & 63A up to 4 poles + auxiliary	0172569
Empty Enclosure dimensions 220 x 150 x 100 for 50 & 63A up to 6 poles + auxiliary	0172579
Empty Enclosure dimensions 220 x 150 x 100 for 80 & 100A up to 4 poles + auxiliary	0172589
Empty Enclosure dimensions 300 x 220 x 100 for 80 & 100A up to 6 poles + auxiliary	0172599

ENCLOSURE DIMENSIONS

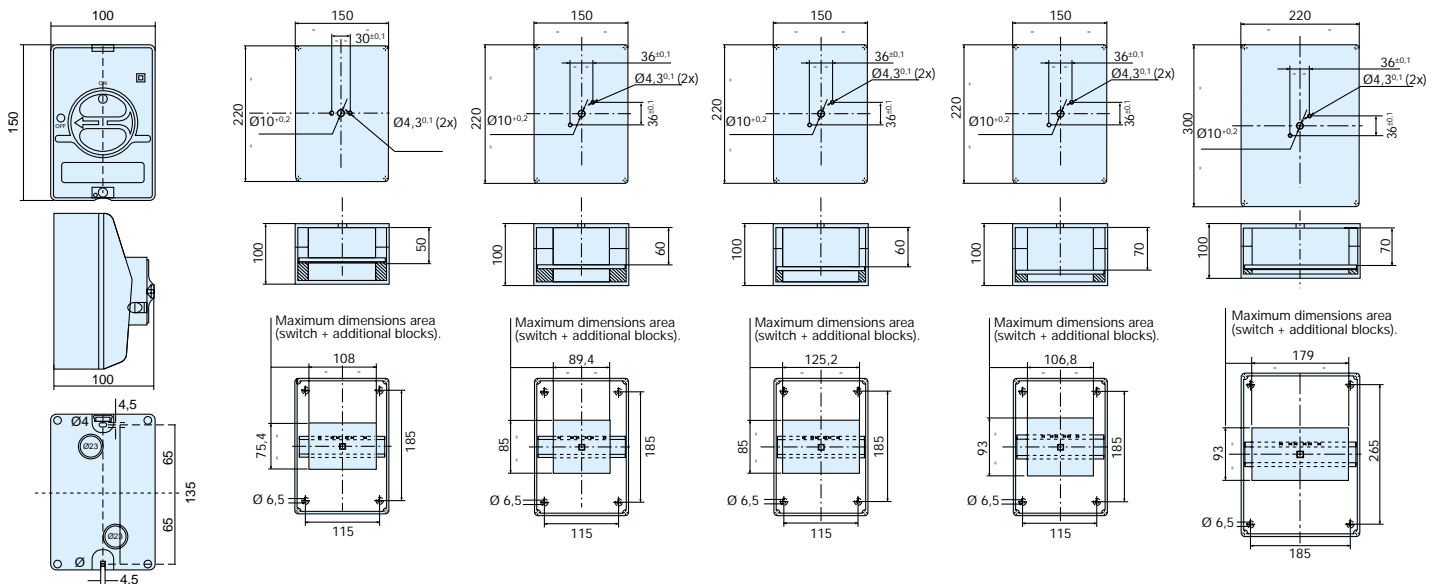

Enclosure for 25 and 32A Reverso up to 4 Poles + NC/NO

Enclosure for 25 and 32 A REVERSO up to 6 poles + NC/NO

Enclosure for 50 and 63 A REVERSO up to 4 poles + NC/NO

Enclosure for 50 and 63 A REVERSO up to 6 poles + NC/NO

Enclosure for 80 and 100 A REVERSO up to 3 poles + NC/NO

Enclosure for 80 and 100 A REVERSO up to 6 poles + NC/NO

Tel 0131 448 2828 Fax 0131 448 2880
e-mail: sales@lpc-uk.com



The Panel Products Catalogue



2001
PRICE
LISTS

1. Control & Signalling
2. Camswitches
3. Switch Disconnectors
4. Residual Current Circuit Breakers
5. Relays
6. Timers
7. Control Relays
8. Counters
9. Solid State Relays
10. Solid State Interface Relays
11. Signal Towers, Beacons & Sounders
12. Footswitches

A u t o m a t i o n & C o n t r o l
S p e c i a l i s t s

and a whole lot more!

REVERSO 2001

ITEM NO.	DESCRIPTION	SALE PRICE 01
0165009	Clutch Drive & Door Interlock 25A 3 Pole	£15.36
0165019	Clutch Drive & Door Interlock 25A 3 Pole + NC/NO	£18.42
0165029	Clutch Drive & Door Interlock 25A 4 Pole Neutral L	£19.79
0165039	Clutch Drive & Door Interlock 25A 4 Pole Neutral L + NC/NO	£22.86
0165049	Clutch Drive & Door Interlock 25A 4 Pole Neutral R	£19.79
0165059	Clutch Drive & Door Interlock 25A 4 Pole Neutral R + NC/NO	£22.86
0165109	Clutch Drive & Door Interlock 32A 3 Pole	£16.51
0165119	Clutch Drive & Door Interlock 32A 3 Pole + NC/NO	£19.58
0165129	Clutch Drive & Door Interlock 32A 4 Pole Neutral L	£21.09
0165139	Clutch Drive & Door Interlock 32A 4 Pole Neutral L + NC/NO	£24.16
0165149	Clutch Drive & Door Interlock 32A 4 Pole Neutral R	£21.09
0165159	Clutch Drive & Door Interlock 32A 4 Pole Neutral R + NC/NO	£24.16
0165209	Clutch Drive & Door Interlock 50A 3 Pole	£19.24
0165219	Clutch Drive & Door Interlock 50A 3 Pole + NC/NO	£22.30
0165229	Clutch Drive & Door Interlock 50A 4 Pole Neutral L	£24.34
0165239	Clutch Drive & Door Interlock 50A 4 Pole Neutral L + NC/NO	£27.40
0165249	Clutch Drive & Door Interlock 50A 4 Pole Neutral R	£24.34
0165259	Clutch Drive & Door Interlock 50A 4 Pole Neutral R + NC/NO	£27.40
0165309	Clutch Drive & Door Interlock 63A 3 Pole	£23.93
0165319	Clutch Drive & Door Interlock 63A 3 Pole + NC/NO	£27.00
0165329	Clutch Drive & Door Interlock 63A 4 Pole Neutral L	£30.03
0165339	Clutch Drive & Door Interlock 63A 4 Pole Neutral L + NC/NO	£33.09
0165349	Clutch Drive & Door Interlock 63A 4 Pole Neutral R	£30.03
0165359	Clutch Drive & Door Interlock 63A 4 Pole Neutral R + NC/NO	£33.09
0165409	Clutch Drive & Door Interlock 80A 3 Pole	£30.42
0165419	Clutch Drive & Door Interlock 80A 3 Pole + NC/NO	£33.48
0165429	Clutch Drive & Door Interlock 80A 4 Pole Neutral L	£37.62
0165439	Clutch Drive & Door Interlock 80A 4 Pole Neutral L + NC/NO	£40.69
0165449	Clutch Drive & Door Interlock 80A 4 Pole Neutral R	£37.62
0165459	Clutch Drive & Door Interlock 80A 4 Pole Neutral R + NC/NO	£40.69
0165509	Clutch Drive & Door Interlock 100A 3 Pole	£39.69
0165519	Clutch Drive & Door Interlock 100A 3 Pole + NC/NO	£42.76
0165529	Clutch Drive & Door Interlock 100A 4 Pole Neutral L	£47.74
0165539	Clutch Drive & Door Interlock 100A 4 Pole Neutral L + NC/NO	£50.80
0165549	Clutch Drive & Door Interlock 100A 4 Pole Neutral R	£47.74
0165559	Clutch Drive & Door Interlock 100A 4 Pole Neutral R + NC/NO	£50.80
0172000	Switch Body 3 Pole 25A	£10.46
0172001	Front Mount Switch & Handle 25A 3 Pole	£11.63
0172009	Enclosure Mounted Switch 25A 6 Pole	£37.49
0172011	Front Mount Switch & Handle 25A 3 Pole + NC/NO	£14.69
0172021	Front Mount Switch & Handle 25A 4 Pole Neutral L	£16.06
0172029	Enclosure Mounted Switch 25A 6 Pole + NC/NO	£40.56
0172031	Front Mount Switch & Handle 25A 4 Pole Neutral L + NC/NO	£19.13
0172041	Front Mount Switch & Handle 25A 4 Pole Neutral R	£16.06
0172051	Front Mount Switch & Handle 25A 4 Pole Neutral R + NC/NO	£19.13
0172061	Enclosure Mounted Switch 25A 3 Pole	£17.49
0172065	Neutral Pole 25A	£4.44
0172071	Enclosure Mounted Switch 25A 3 Pole + NC/NO	£20.56
0172075	Additional Pole 25A	£5.08
0172081	Enclosure Mounted Switch 25A 4 Pole Neutral L	£21.93
0172091	Enclosure Mounted Switch 25A 4 Pole Neutral L + NC/NO	£24.99
0172100	Switch Body 3 Pole 32A	£11.62

0172101	Front Mount Switch & Handle 32A 3 Pole	£12.78
0172109	Enclosure Mounted Switch 32A 6 Pole	£39.12
0172111	Front Mount Switch & Handle 32A 3 Pole + NC/NO	£15.85
0172121	Front Mount Switch & Handle 32A 4 Pole Neutral L	£17.36
0172129	Enclosure Mounted Switch 32A 6 Pole + NC/NO	£42.19
0172131	Front Mount Switch & Handle 32A 4 Pole Neutral L + NC/NO	£20.43
0172141	Front Mount Switch & Handle 32A 4 Pole Neutral R	£17.36
0172151	Front Mount Switch & Handle 32A 4 Pole Neutral R + NC/NO	£20.43
0172161	Enclosure Mounted Switch 32A 3 Pole	£18.65
0172165	Neutral Pole 32A	£4.58
0172167	Terminal Cover 3 Pole Switch Body Size1	£0.43
0172171	Enclosure Mounted Switch 32A 3 Pole + NC/NO	£21.72
0172175	Additional Pole 32A	£5.22
0172177	Terminal Cover Neutral Pole Size1	£0.29
0172179	Auxiliary NO + NC Contact	£3.07
0172181	Enclosure Mounted Switch 32A 4 Pole Neutral L	£23.23
0172185	Junction Block *Size1	£5.23
0172187	Rear Mounting Plate Size1	£0.68
0172189	Terminal Cover (Pair) Auxiliary NO + NC	£0.45
0172191	Enclosure Mounted Switch 32A 4 Pole Neutral L + NC/NO	£26.30
0172195	1 Pole Early Break Size 1	£4.37
0172197	1 Pole Early Make Size 1	£4.84
0172199	Terminal Cover Early Make / Early Break	£0.72
0172200	Switch Body 3 Pole 50A	£14.34
0172201	Front Mount Switch & Handle 50A 3 Pole	£15.51
0172209	Enclosure Mounted Switch 50A 6 Pole	£48.05
0172211	Front Mount Switch & Handle 50A 3 Pole + NC/NO	£18.57
0172221	Front Mount Switch & Handle 50A 4 Pole Neutral L	£20.61
0172229	Enclosure Mounted Switch 50A 6 Pole + NC/NO	£51.12
0172231	Front Mount Switch & Handle 50A 4 Pole Neutral L + NC/NO	£23.67
0172241	Front Mount Switch & Handle 50A 4 Pole Neutral R	£20.61
0172251	Front Mount Switch & Handle 50A 4 Pole Neutral R + NC/NO	£23.67
0172261	Enclosure Mounted Switch 50A 3 Pole	£30.09
0172265	Neutral Pole 50A	£5.10
0172267	IP65 Kit Front Mount *Size1 & *Size2	£1.46
0172271	Enclosure Mounted Switch 50A 3 Pole + NC/NO	£33.16
0172275	Additional Pole 50A	£5.74
0172277	IP65 Kit Front Mount *Size3	£1.46
0172281	Enclosure Mounted Switch 50A 4 Pole Neutral L	£35.19
0172291	Enclosure Mounted Switch 50A 4 Pole Neutral L + NC/NO	£38.25
0172300	Switch Body 3 Pole 63A	£19.03
0172301	Front Mount Switch & Handle 63A 3 Pole	£20.20
0172309	Enclosure Mounted Switch 63A 6 Pole	£56.05
0172311	Front Mount Switch & Handle 63A 3 Pole + NC/NO	£23.27
0172321	Front Mount Switch & Handle 63A 4 Pole Neutral L	£26.30
0172329	Enclosure Mounted Switch 63A 6 Pole + NC/NO	£59.11
0172331	Front Mount Switch & Handle 63A 4 Pole Neutral L + NC/NO	£29.36
0172341	Front Mount Switch & Handle 63A 4 Pole Neutral R	£26.30
0172351	Front Mount Switch & Handle 63A 4 Pole Neutral R + NC/NO	£29.36
0172361	Enclosure Mounted Switch 63A 3 Pole	£34.78
0172365	Neutral Pole 63A	£6.10
0172367	Terminal Cover 3 Pole Switch Body Size2	£0.77
0172371	Enclosure Mounted Switch 63A 3 Pole + NC/NO	£37.85
0172375	Additional Pole 63A	£6.74
0172377	Terminal Cover Neutral Pole Size2	£0.62
0172381	Enclosure Mounted Switch 63A 4 Pole Neutral L	£40.88

0172385	Junction Block *Size2	£6.80
0172387	Rear Mounting Plate Size2	£0.92
0172391	Enclosure Mounted Switch 63A 4 Pole Neutral L + NC/NO	£43.95
0172395	1 Pole Early Break Size 2	£4.37
0172397	1 Pole Early Make Size 2	£4.84
0172400	Switch Body 3 Pole 80A	£23.83
0172401	Front Mount Switch & Handle 80A 3 Pole	£25.64
0172409	Enclosure Mounted Switch 80A 6 Pole	£90.70
0172411	Front Mount Switch & Handle 80A 3 Pole + NC/NO	£28.70
0172421	Front Mount Switch & Handle 80A 4 Pole Neutral L	£32.84
0172429	Enclosure Mounted Switch 80A 6 Pole + NC/NO	£93.77
0172431	Front Mount Switch & Handle 80A 4 Pole Neutral L + NC/NO	£35.91
0172441	Front Mount Switch & Handle 80A 4 Pole Neutral R	£32.84
0172451	Front Mount Switch & Handle 80A 4 Pole Neutral R + NC/NO	£35.91
0172461	Enclosure Mounted Switch 80A 3 Pole	£61.19
0172465	Neutral Pole 80A	£7.21
0172471	Enclosure Mounted Switch 80A 3 Pole + NC/NO	£64.26
0172475	Additional Pole 80A	£7.84
0172481	Enclosure Mounted Switch 80A 4 Pole Neutral L	£73.39
0172491	Enclosure Mounted Switch 80A 4 Pole Neutral L + NC/NO	£76.46
0172500	Switch Body 3 Pole 100A	£33.10
0172501	Front Mount Switch & Handle 100A 3 Pole	£34.91
0172509	Enclosure Mounted Switch 100A 6 Pole	£102.74
0172511	Front Mount Switch & Handle 100A 3 Pole + NC/NO	£37.98
0172521	Front Mount Switch & Handle 100A 4 Pole Neutral L	£42.96
0172529	Enclosure Mounted Switch 100A 6 Pole + NC/NO	£105.81
0172531	Front Mount Switch & Handle 100A 4 Pole Neutral L + NC/NO	£46.02
0172541	Front Mount Switch & Handle 100A 4 Pole Neutral R	£42.96
0172549	Empty Enclosure	£6.35
0172551	Front Mount Switch & Handle 100A 4 Pole Neutral R + NC/NO	£46.02
0172559	Empty Enclosure	£11.73
0172561	Enclosure Mounted Switch 100A 3 Pole	£70.47
0172565	Neutral Pole 100A	£8.04
0172567	Terminal Cover 3 Pole Switch Body Size3	£0.95
0172569	Empty Enclosure	£14.98
0172571	Enclosure Mounted Switch 100A 3 Pole + NC/NO	£73.53
0172575	Additional Pole 100A	£8.68
0172577	Terminal Cover Neutral Pole Size3	£0.72
0172579	Empty Enclosure	£15.38
0172581	Enclosure Mounted Switch 100A 4 Pole Neutral L	£83.50
0172585	Junction Block *Size3	£9.02
0172587	Rear Mounting Plate Size3	£1.26
0172589	Empty Enclosure	£36.35
0172591	Enclosure Mounted Switch 100A 4 Pole Neutral L + NC/NO	£86.57
0172595	1 Pole Early Break Size 3	£4.37
0172597	1 Pole Early Make Size 3	£4.84
0172599	Empty Enclosure	£41.55
0172601	Padlockable Handle Red / Yellow Size1-2	£1.17
0172602	Quadral 64x64 Red / Yellow Size1	£1.98
0172603	Padlockable, Dia22 Red / Yellow Size1	£1.79
0172604	Quadral48x48, Dia22 Red / Yellow Size1	£2.06
0172612	Quadral 72x72 Red / Yellow Size2	£2.18
0172621	Padlockable Handle Red / Yellow Size3	£1.81
0172622	Quadral 96x96 Red / Yellow Size3	£2.78
0172629	Duty Label Blank	£0.92
0172649	Duty Label "MAINSWITCH"	£1.11

0174179	Clutch Drive Kit (Without Shaft)	£2.08
0174189	Clutch Drive Kit 250mm Shaft	£2.77
0174195	2 Pole Early Break Size 1	£8.08
0174199	Clutch Drive Kit 400mm Shaft	£3.82
0174249	Door Interlock Shroud	£0.96
0174259	IP65 Kit Rear Mount *Size1 & *Size2	£1.21
0174269	IP65 Kit Rear Mount *Size3	£1.53
0174395	2 Pole Early Break Size 2	£8.08
0174595	2 Pole Early Break Size 3	£8.08